



# HEIDE-PUMPEN

more than 25 years of experience

**HEIDE-PUMPEN GmbH**

Am Maibusch 102-106 • 45883 Gelsenkirchen, Germany  
Tel.: +49 (0)2 09 / 9 41 39-0 • Fax: +49 (0)2 09 / 9 41 39-99

E-Mail: [info@heide-pumpen.de](mailto:info@heide-pumpen.de)

Web: <http://www.heide-pumpen.de>

## High pressure jetting pump

**HD-Series**



ISO 9001  
BUREAU VERITAS  
Certification



# High pressure jetting pump

## Type HE/HD Areas of application:

Purging of wellpoints, wells or piles, water supply on building sites, filling and pressing of pipelines, cleaning of building crafts, firefighting, irrigation/sprinkling, dust-bonding in blasting operations.


## Assemblies:

### High-pressure pump:

The pump consists of a normal-sucking high pressure multi-stage centrifugal pump. Applicable for delivering of sparsely polluted low opacified water. The intake is done by the hand-operated diaphragm pump.

### Engine:

Diesel engine air-cooled / water-cooled with electrical starter.

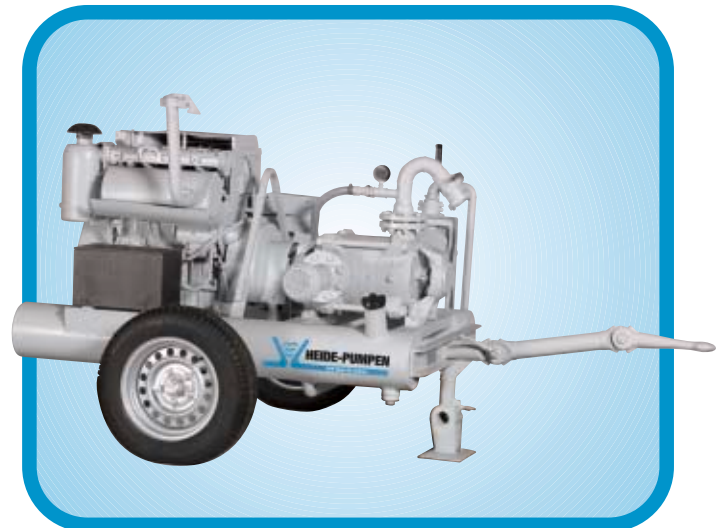

Outlets of pump's pressure are selectable with connections for fast coupling

Type	HD 50	HD 80
Water max. m <sup>3</sup> /h	52	82
At a pressure of bar	16,9	17,1
kw	22	30
Motor	Diesel-engine air-cooled or watercooled	Diesel-engine air-cooled or watercooled
Speed rpm	3000	3000
Start	electr.	electr.
Suction connection	1 x 108 male	1 x 108 male
Discharge connection	1 x 50 C-coupling	1 x 50 C-coupling
length mm	1900	2050
width mm	1400	1400
height mm	1300	1600
weight kg	620	910


### Chassis Type HD:

Constructed on a tank body chassis, - 6 km/h construction traffic -, pneumatic-tired, with removable trailer drawbar and an eyelet of a crane hook

### also available: Chassis Type HE:

Constructed on a single axed chassis, - 6 km/h construction traffic -, pneumatic-tired with removable trailer drawbar and an eyelet of a crane hook.

**- tropical version available -**

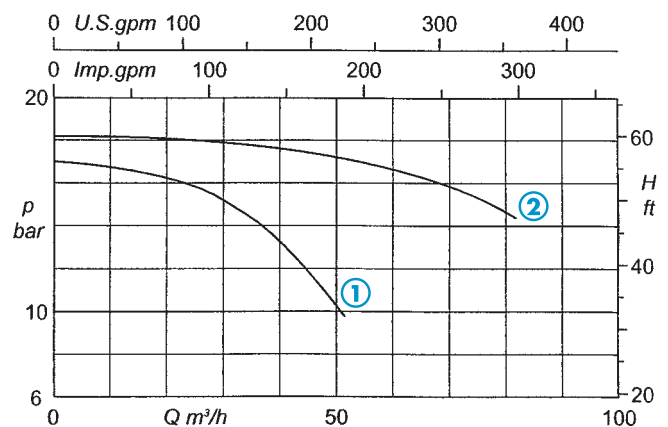

① = Type HD 50

② = Type HD 80